




FOR INDUSTRY PROFESSIONALS




# TEST GAUGES

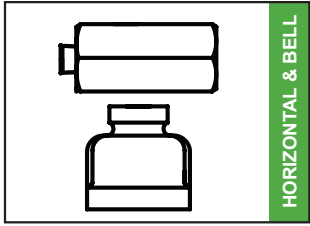


HORIZONTAL & BELL

Test gauges are available in both horizontal and bell form with 1/2" and 3/4" connections.

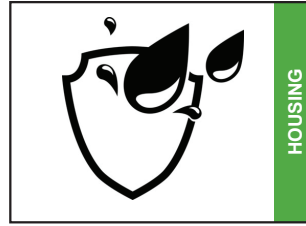


HOUSING

Bell housing is made of cast iron and black antirust paint while the horizontal hex manifold is chrome plated.

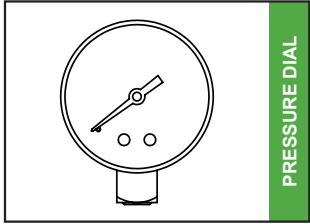

PRESSURE DIAL

The size of the pressure dial is 2" and signals up to 15 psi or 30 psi.

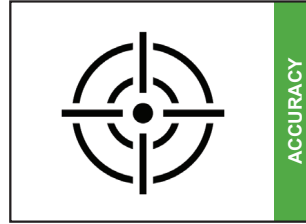


ACCURACY

Test gauges have an accuracy grade of ±3%, ±2%, ±3%.

	TRADEPRO	SIZE	PSI	DIAL SIZE	STYLE	CARTON QTY	UOM
TEST GAUGES	TP-GTESTH-1/2-15	1/2" NPT	0-15	2"	HORIZONTAL	20 pcs	EA
	TP-GTESTB-1/2-15	1/2" NPT	0-15	2"	BELL	20 pcs	EA
	TP-GTESTH-3/4-15	3/4" NPT	0-15	2"	HORIZONTAL	20 pcs	EA
	TP-GTESTB-3/4-15	3/4" NPT	0-15	2"	BELL	20 pcs	EA
	TP-GTESTB-1/2-30	1/2" NPT	0-30	2"	BELL	20 pcs	EA
	TP-GTESTB-3/4-30	3/4" NPT	0-30	2"	BELL	20 pcs	EA
	TP-GTESTH-3/4-30	3/4" NPT	0-30	2"	HORIZONTAL	20 pcs	EA

## TP-GTESTH-1/2-15

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Hex manifold	1	Q235	Chrome plated
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 15 psi 1/2" NPT Horizontal Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )


ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 15 psi

Hex manifold material: Q 235, chrome plated

Socket thread: 1/2" FNPT

## TP-GTESTH-3/4-15

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Hex manifold	1	Q235	Chrome plated
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 15 psi 3/4" NPT Horizontal Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )

ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 15 psi

Hex manifold material: Q 235, chrome plated

Socket thread: 3/4" FNPT

## TP-GTESTB-1/2-30

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Bell manifold	1	Cast Iron	Chrome plated
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 30 psi 1/2" NPT Bell Housing Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )


ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 30 psi

Bell housing manifold material: cast iron, black antirust paint

Socket thread: 1/2" FNPT

## TP-GTESTH-3/4-30

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Hex manifold	1	Q235	Chrome plated
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 30 psi 3/4" NPT Horizontal Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )


ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 30 psi

Hex manifold material: Q 235, chrome plated

Socket thread: 3/4" FNPT

## TP-GTESTB-1/2-15

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Bell manifold	1	Cast Iron	Black antirust paint
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 15 psi 1/2" NPT Bell Housing Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )


ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 15 psi

Bell housing manifold material: cast iron, black antirust paint

Socket thread: 1/2" FNPT

## TP-GTESTB-3/4-15

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Bell manifold	1	Cast Iron	Black antirust paint
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 15 psi 3/4" NPT Bell Housing Socket		

Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )


ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 15 psi

Bell housing manifold material: cast iron, black antirust paint

Socket thread: 1/2" FNPT

## TP-GTESTB-3/4-30

No.	Parts	Qty	Material	Note
1	Socket	1	Hpb59-1	
2	Dial plate	1	Al alloy	White Background
3	Case	1	ST14	Black
4	Bezel	1	ST14	Black
5	Lens	1	Acrylic	
6	Bell manifold	1	Cast Iron	Chrome plated
7	Snifter Valve	1	Hpb59-1	Chrome plated
		Gauge 2", 30 psi 3/4" NPT Bell Housing Socket		


Accuracy: grade B ( $\pm 3\%$ ,  $\pm 2\%$ ,  $\pm 3\%$ )

ANSI B40.1 gauges

Pressure gauges dial size: 2", pressure range: 30 psi

Bell housing manifold material: cast iron, black antirust paint

Socket thread: 3/4" FNPT

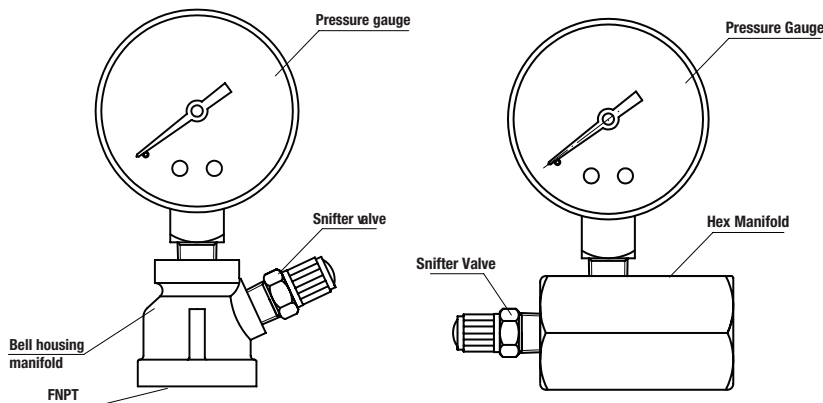

**Why Sell TradePro Test Gauges**

Trade Pro Test Gauges are used to test natural gas and propane piping systems for leaks by pressuring the piping system with air.

TEST GAUGES									
SIZE	PSI	TRADEPRO	CAMBRIDGE	BRAMEC	DANCO	CHERNE	SIoux CHIEF	GEKKO INC	
1/2" NPT	0-15	TP-GTESTH-1/2-15	200368	19637				GT-1/2-15-H	
1/2" NPT	0-15	TP-GTESTB-1/2-15	200369	19640				GT-1/2-15-BELL	
3/4" NPT	0-15	TP-GTESTH-3/4-15	200370	19638	94352	24568	355-15PK1	GT-3/4-15-H	
3/4" NPT	0-15	TP-GTESTB-3/4-15	200371	19641				GT-3/4-15-BELL	
1/2" NPT	0-30	TP-GTESTB-1/2-30	200372	17711				GT-1/2-30-BELL	
3/4" NPT	0-30	TP-GTESTB-3/4-30	200373	17712				GT-3/4-30-BELL	
3/4" NPT	0-30	TP-GTESTH-3/4-30	200396	17256	61700	19698	355-30PK1		

Cambridge™, Bramec®, Danco, Cherne®, Sioux Chief, and Gekko Inc., are trademarks of their respective owners.

Reasonable effort has been made to assure the accuracy of cross-reference information. However, final evaluation for suitable replacement is left to the installer.